


Crosses Across America, Inc.



International Headquarters
3300 Indiana Avenue, Suite C
Vicksburg, Mississippi 39180-4540
Phone (601) 619-0169
Fax (601) 634-0601
Email: crosses@cablelynx.com
www.crossesacrossamerica.org

CROSS RESTORATION TECHNICAL INFORMATION

The Standing Crosses are made of California Douglas Fir and are set in pea gravel and sand. Do not lean or climb them. They weigh approximately 400 pounds each. They need 2 coats of paint. It will take 2 gallons of paint - one blue, one gold. The paint can be purchased at a Sherwin-Williams Store or at Wal-Mart. If you do not have a Sherwin-Williams Store or a Wal-Mart Store in your immediate vicinity, take paint chips from the Crosses and have another paint supplier match them.

Other items you will need include:

- (1) **3 " Roller**, preferably lambs wool
- (2) **20 ' Extension Pole**
- (3) **Wedge** to straighten the Crosses if they are leaning. One or two wedges and a rope. To straighten a leaning Cross, toss the rope between the X of the Cross and use as a leverage. Pull on the rope and drive a wedge to hold the Cross. Some have used a cant hook to turn a Cross - and with much success.

As you are doing the Lord's work, please say a prayer.

SHERWIN-WILLIAMS PAINT FORMULA

Gold Paint: Base: B54T104 (7969-99993)

Blue Paint: B54101 (7907-9993)

Mixed With: Umber: N1-8/32

Maroon: R2-1/32

W1 White: 2Y-24/32

Y1 Yellow: 25/32 & 1/64

Y3 Gold: 8 Y-23/32

Mixed With: B1-Black: 1/6 & 1/28

L1-Blue: 1/64 & 1/28

G1-Green: 1/32 & 1/64

If you are using Sherwin-Williams paint, don't forget to take these formulas with you to the store.


WAL-MART PAINT FORMULA

Base: 1 Gallon of either Accent Base or Light Base (For either Gold or Blue)

Gold Paint: B: 4; C: 9Y16; KX: 1Y20; V 18.

Blue Paint: B: 18; C: 18; D: 6.

If you are using Wal-Mart paint, don't forget to take these formulas with you to the store.

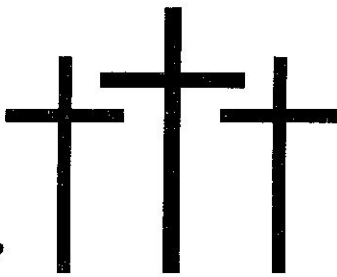

Gate of Entry Permission Form

I do hereby grant permission to:


a Gate of Entry on my property located at:

I do hereby release Crosses Across America, Inc.,
3300 Indiana Avenue, Suite C, Vicksburg, MS
39180, from any liability to either personal or real
property at this location for either erection or
maintenance of the three Crosses at above
location.

Signed: _____

(Please include address and daytime telephone number.)

Witness: _____

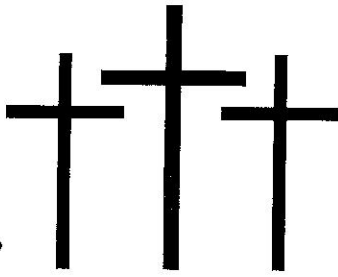

Release of Liability Form


I do hereby release the liability of:

for the repair/construction of Crosses on his/her
property located at:

and, furthermore, Crosses Across America, Inc.,
3300 Indiana Avenue, Suite C, Vicksburg, MS
39180, assumes any liability to either personal or
real property at this location for either repair and/
or construction of the three Crosses at the above
location.

Signed: _____, Executive Director

Date: _____

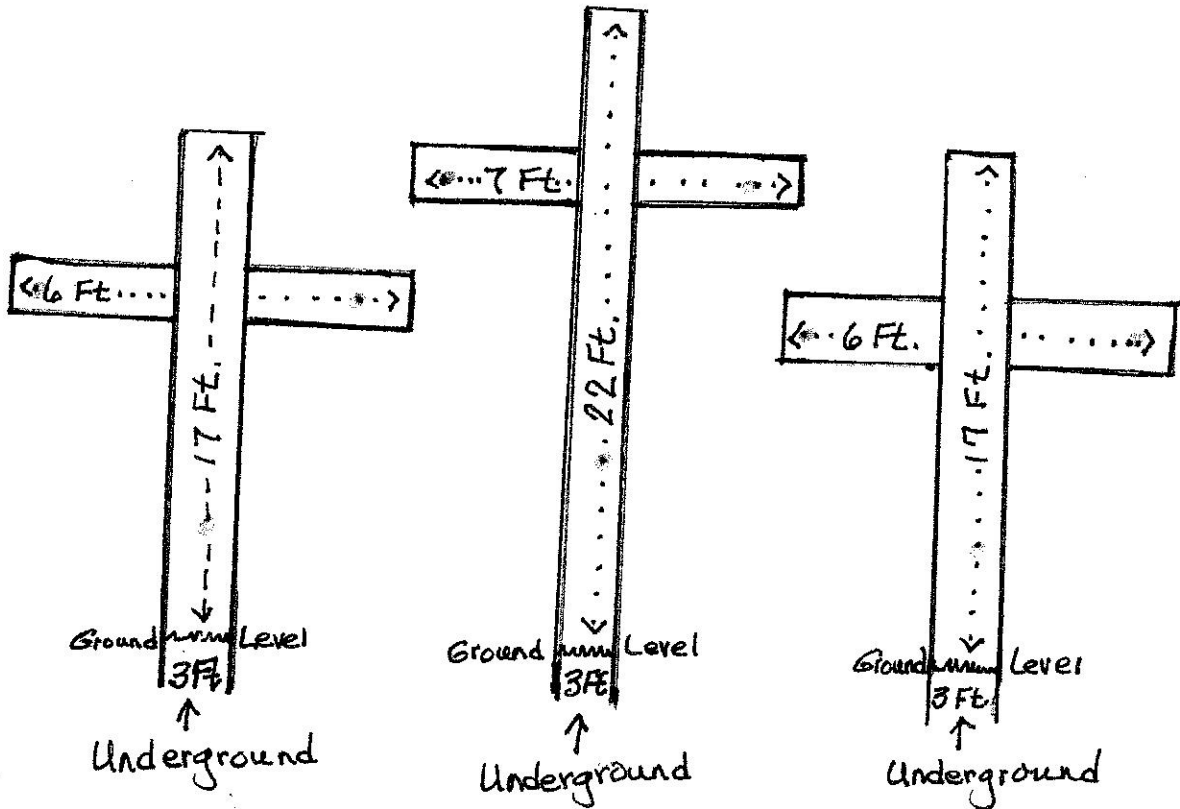

DETAILS

THE CROSSES ARE 7" IN DIAMETER & ARE MADE OF CALIFORNIA DOUGLAS FIR OR SOME OTHER TREATED POLES OR COAT THAT WHICH WILL BE UNDERGROUND WITH A COAT OF TAR. THE CENTER CROSS IS 25' WITH 3' IN THE GROUND. THE FLANKING CROSSES ARE 20' TALL WITH 3' IN THE GROUND. PLEASE USE PEA GRAVEL AND SAND AND/OR SACRETE TO KEEP THEM IN PLACE.

NOTCH 1/3 OF THICKNESS FOR CROSS PIECES. THE TOP OF THE CROSS ARMS ARE 4' FROM TOP OF POLE. THE THREE EXPOSED NAILS ARE 6" FROM EACH END OF CROSS PIECE & 5' FROM GROUND. THE CENTER CROSS IS PAINTED GOLD & OTHER CROSSES ARE PALE BLUE.

YOU WILL NEED A POST HOLE DIGGER OR AUGER FOR THE 3' HOLE. OTHER REQUIREMENTS ARE LISTED ON TECHNICAL INFORMATION SHEET.